


How to Simply Connect WX, WS & PM-A Series via USB

This document contains instructions on how to simply **connect to Tabor Electronics devices** via their USB port. The following devices are covered in this document.

- ◆ Entire WX Series
- ◆ WS8351 / WS8352
- ◆ PM8571A / PM8572A

➔ **To connect the Tabor unit via the USB port:**

1. Install the IVI Foundation device driver, which can be accessed either on the CD-ROM disk provided with your Tabor device, or from Tabor Electronics web site at <http://www.taborelec.com/>.
2. To download the driver from the web site, click on **Downloads**, and select the model from the **Model Number** drop-down box, and select "Drivers" from the **Download Type** drop-down box. Click on the **Search** button.

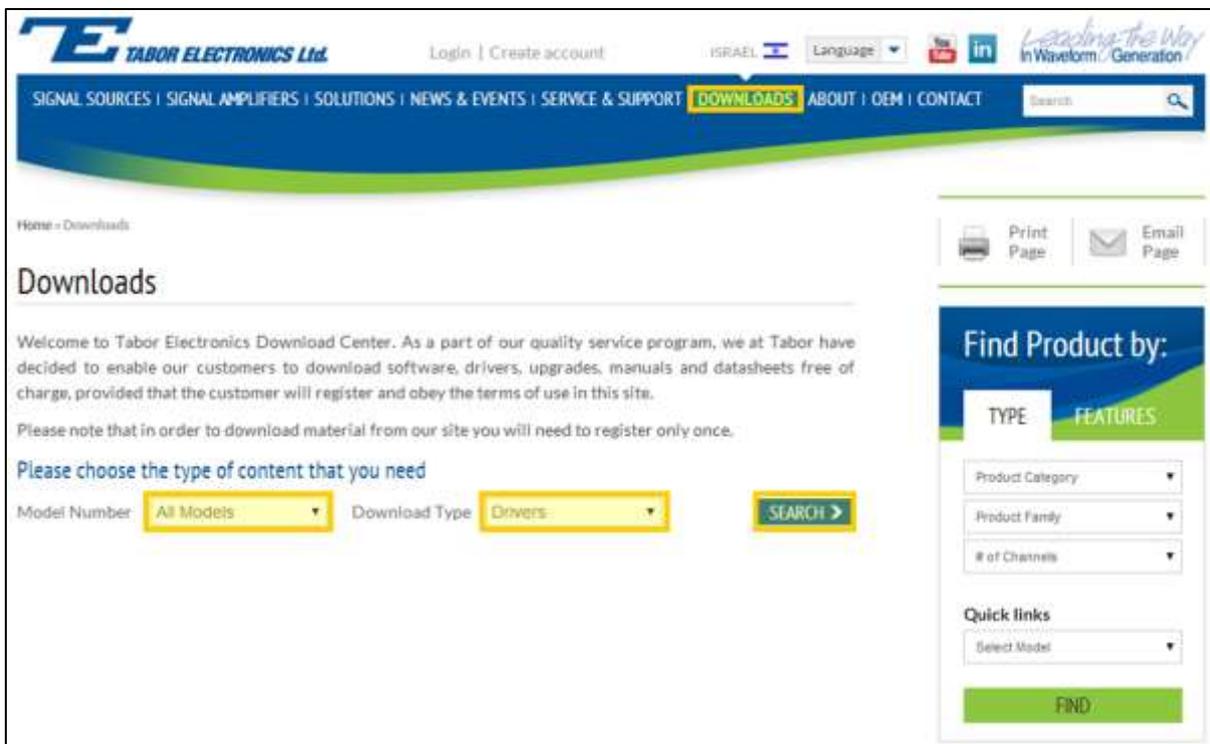

The screenshot shows the 'Downloads' page on the Tabor Electronics website. The page header includes the company logo, navigation links (SIGNAL SOURCES, SIGNAL AMPLIFIERS, SOLUTIONS, NEWS & EVENTS, SERVICE & SUPPORT, DOWNLOADS, ABOUT, OEM, CONTACT), and a search bar. The main content area is titled 'Downloads' and contains a welcome message and a search form. The search form has two dropdown menus: 'Model Number' set to 'All Models' and 'Download Type' set to 'Drivers'. A 'SEARCH' button is visible. On the right side, there is a 'Find Product by:' section with dropdown menus for 'Product Category', 'Product Family', and '# of Channels', and a 'Quick links' section with a 'Select Model' dropdown. A 'FIND' button is at the bottom of the right sidebar.

Download a suitable IVI Foundation driver (for either 32-bit or 64-bit operating systems) from the selection of drivers that appears.

Model

Drivers	Device driver by IVI Foundation (32 bit OS)	02/02/2014  Download (7.6 Mb) Ver. 2.2.1
Drivers	Device driver by IVI Foundation (64 bit OS)	02/02/2014  Download (10.7 Mb) Ver. 2.2.1

- To activate the USB interface, access the **Select Interface** screen from the **Utility >> Remote Interface** menu, select the **USB** option, and press **ENTER**.



- Connect your computer to the device using a USB cable. The following messages will appear on your computer screen:



5. The Hardware Wizard appears as shown below. Choose the **Install the software automatically (Recommended)** option and click **Next**.



6. Upon completion of the installation, the window shown below appears. Click **Finish**.



7. To make sure the device's USB port is correctly configured, open your Device Manager (**Control Panel >> Hardware and Sound >> Devices and Printers >> Device Manager**) and compare the settings to the settings displayed in the window below.



For More Information

To learn more about Tabor's solutions or to schedule a demo, please contact your local Tabor representative or email your request to info@tabor.co.il. More information can be found at our website at www.taborelec.com

© Proprietary of Tabor Electronics Ltd.